

AYTOMATO UTOMATIC BOTTOMS FEEDER

SMA-123




NOURIS

GENERAL FEATURES /

- The traction of the bottoms made by two chains with special grips./
- Variation of chain speed by an inverter./
- Plc controls all the operations./

TECHINICAL DATA /

| | | | |
|--------------------------------------|---|---|---|
| Total installed power / | μ | : | 1kW |
| Electric supply / H | | : | 3x380V+10% - 50Hz |
| Air consumption / | μ | : | 80 Nlit/min |
| Pressure of compressed air (min) / E | | : | 6 bar |
| Capacity / (max) : | | | 4500 /h |
| Dimension of bottoms / | | : | Length (μ) : 185 – 600mm (SMA123-S) 285 – 600mm (SMA123-F) |
| | | : | Width () : 185 – 400mm |
| Weight / | | : | 250 Kg appr. |

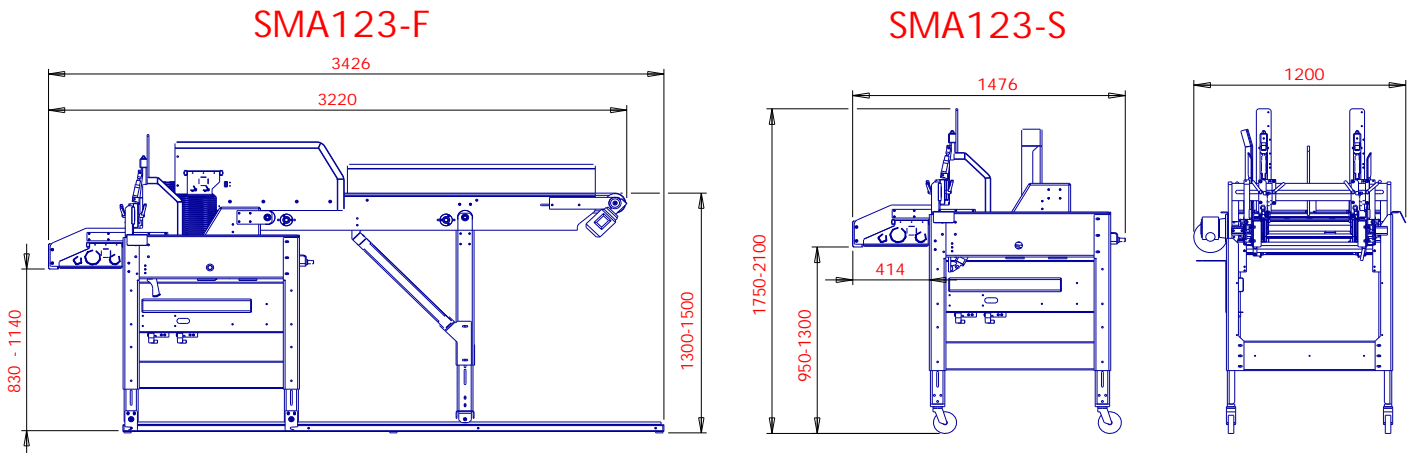

NOURIS

M. . .

14o Km old national road Thessaloniki - Veria
P.O. Box 4, 570 08 I NIA,
Tel: 2310 722 506, Fax: 2310 722 086
http://: www.nouris.gr

NOURIS M. SONS O.E.

14th km. old National Road Thessaloniki - Veria
P.O. Box 4, 570 08 Ionia, Thessaloniki, Greece
tel: 0030 2310 722 506, Fax: 0030 2310 722 086
http://: www.nouris.gr